

AMS22

SECTORS:



CHARACTERISTICS:

- Unbalanced.
- System attached to the shaft by allen screws.
- Not dependent on the rotation direction.

OPERATING LIMITS:

$d_r = 20 \text{ to } 100 \text{ mm}$ $p = 12 \text{ kg/cm}^2$

$v = 20 \text{ m/s}$ $t = -40 \text{ to } +200^\circ\text{C} (*)$

(*) The temperature resistance depends on the material of the secondary seals used.


The operating limits are defined by the PV factor which is determined for the sealing system characteristics and those of the application.

DESCRIPTION:

The contact surface of the rotating part can be detached, which makes this model extremely versatile as it is easy to exchange contact surfaces made of different materials.

COMPONENTS:

- 1 Rotating contact surface
- 3a O-rings
- 4 Springs
- 5 Metal frame
- 5a Set screws

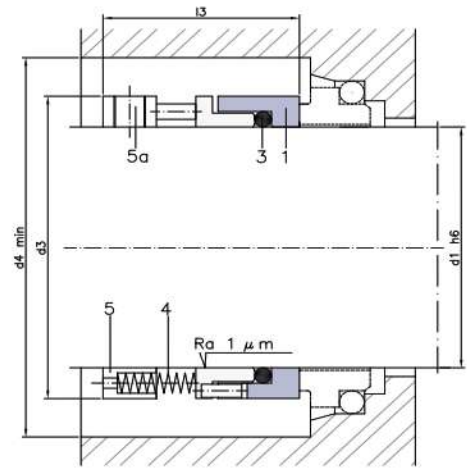

DIMENSIONS CHART Dimensions in mm

Shaft mm	Rotary part		
	d ₃	d ₄	l ₃
20	34	39	35
22	36	41	35
24	38	43	35
25	39	44	35
28	42	47	35
30	44	49	35
32	46	51	35
33	47	52	35
35	49	54	35
38	54	59	38
40	56	61	38
43	59	64	38
45	61	66	38
48	64	69	38
50	66	71	39
53	69	74	40
55	71	76	40
58	76	81	41
60	78	83	41
63	81	86	41
65	83	88	41
68	86	91	41
70	90	95	42
75	95	100	42
80	100	105	42
85	105	110	43
90	110	115	45
95	115	120	45
100	120	125	45

DIMENSIONS CHART For Imperial Shaft Sizes

Shaft (")	mm	Rotary part		
		d ₃	d ₄	l ₃
1.00	25.40	39.70	44.70	41.28
1.13	28.58	42.85	47.85	41.28
1.19	30.15	44.45	49.45	41.28
1.25	31.75	46.02	51.02	41.28
1.38	34.93	49.20	54.20	41.28
1.44	36.50	50.80	55.80	41.28
1.50	38.10	52.37	57.37	41.28
1.63	41.28	58.70	63.72	44.45
1.75	44.45	60.33	65.33	44.45
1.88	47.63	65.07	70.07	44.45
2.00	50.80	68.25	73.25	44.45
2.13	53.98	71.42	76.42	44.45
2.25	57.15	74.60	79.60	44.45
2.38	60.33	77.77	82.77	44.45
2.50	63.50	80.95	85.95	44.45
2.63	66.68	84.12	89.12	44.45
2.75	69.85	87.30	92.30	44.45
2.88	73.03	90.47	95.47	44.45
3.00	76.20	93.65	98.65	44.45
3.13	79.38	101.60	106.60	44.45
3.25	82.55	104.78	109.78	44.45
3.38	85.73	107.95	112.95	44.45
3.50	88.90	111.13	116.13	44.45
3.63	92.08	114.30	119.30	44.45
3.75	95.25	117.48	122.48	46.02
3.88	98.43	120.65	125.65	46.02
4.00	101.60	123.83	128.83	46.02
4.25	107.95	130.18	135.18	52.37
4.50	114.30	136.53	141.53	52.37

Dimensions subject to changes or modifications.